

# SINGLE SPINDLE BAR LOADER

## ONE 42 AND ONE 42s




1. Increase of capacity
2. Reduction of loading time
3. Guide channel made of plastic segments resistant to wearing.
4. Hydrodynamic guiding design
5. Quick channel change system
6. Insertion in the spindle corresponding to the bar diameter worked
7. Centralized adjustment of the diameter worked

### Option

- . Teleservice
- . Bar feeding by means of linear axis

### TECHNICAL DATA

<b>Specifications</b>	
Bar diameters	Depending on lathe model (Standard min Ø5mm max Ø42mm) Special Ø on demand
Bar Length	3200mm - 4000mm
Bar Rack capacity	Standard 500 – 750mm (20" – 30") Bundle capacity 1,2 to (Special capacity on demand)
Bar feeding	Electric
Bar change time	15 - 24 sec Depending on bar length (3,3m/4m)

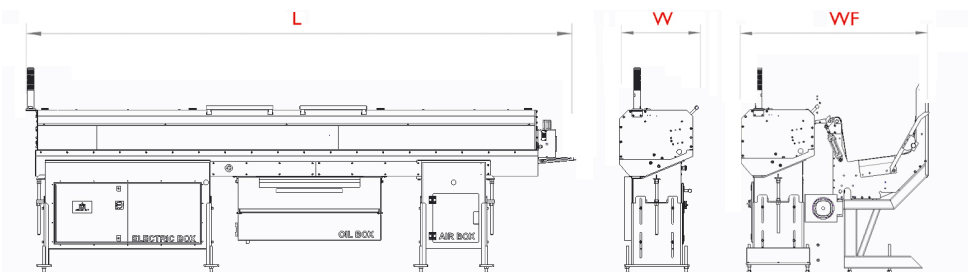

<b>PB 42</b>	
Bar Length	3200mm - 4000mm
Total Length(L)	4500mm - 5300mm
W - Width	650mm
WF - Width with bundle	1550mm
Weight	1300kg - 1450kg - (bundle 750kg)